Downloaded from www.Manualslib.com manuals search engine

C M Y K

Key Features



1

Dual Glass Coated Heating Elements reduces electricity bills, increases the life of the heating element and heats water faster

Dual Glass Coated Heating Elements provide extended life to the water heater by preventing Scale Formation on the element surface. They help in quick water heating. In the unlikely event of one glass coated element failing, the other element ensures that water gets heated. It is recommended in all areas that have hard water.

2

Blue Diamond Glass Lining offers the best protection against tank corrosion

The new Blue Diamond technology with enhanced levels of zircon increases the life of the water heater. The lining is proven to be stronger and more water-resistant than any other in the industry.

3

Anode Rod protects the tank from corrosion

The tank has an anode rod system with a stainless-core that is designed to protect the tank from corrosive elements. The system uses a special cathodic action to fight the corrosive elements which in turn prolongs the life of the water heater.

Downloaded from www.Manualslib.com manuals search engine

A. O. Smith ColourMatch System™ [Decorative Front Panel]

The A. O. Smith ColourMatch System™ allows your water heater to match the colours of your home interiors.

Select the colour of front panel as per your choice.

Blue

Steel Grey

Lavender

Ivory

Red Brick

Olive

Brown

Warranty

The tank carries a warranty of 7 years. The Glass Lined Heating Elements have a warranty of 4 years. The rest of the parts carry a warranty of 2 years.

Please ensure you fill the warranty card enclosed in the packaging, at the time of purchase.

Introducing A Partnership Providing Elite Comfort

A. O. Smith

In 1936, A. O. Smith developed and patented a process to glass-line water heaters.
Today, A. O. Smith Water Products Company; the largest water heater manufacturer in North America, has gained the respect and support of homeowners, contractors, architects, and specifying engineers in over 60 countries by providing innovative technologies and energy efficient solutions.

Downloaded from www.Manualslib.com manuals search engine

C M Y K

Specifications

Model	EWJ-6	EWJ-10	EWJ-15	EWJ-25
Capacity [ltrs.]	6	10	15	25
Power Supply	← 230V / 50Hz →			
Wattage [kW]	2	2	1/2/3	1/2/3
Max Stdg. Loss [kWh/24h/45°C diff.] [as per ISI 2082:1993 amended in 2002]	0.792	0.99	1.138	1.386
Actual Stdg. Loss [kWh/24h/45°C diff.]	0.51	0.62	0.75	0.924
Reheating Time for 50°C rise [in min]	16	33	48 for 2kW 38 for 3kW	72 for 2kW 58 for 3kW
Rated Pressure [bar]	8	8	8	8

Dimensions

Model	EWJ-6	EWJ-10	EWJ-15	EWJ-25
A [mm]	317	373	373	444
B1 [mm]	317	373	373	444
B2 [mm]	326	380	383	453
C [mm]	258	277	340	374

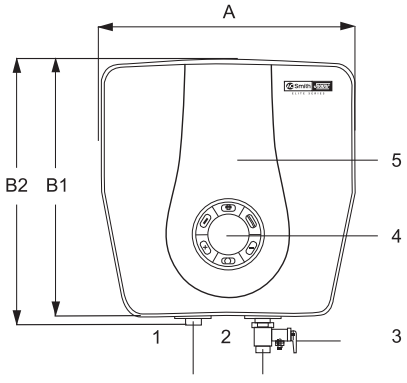

Parts Descriptors

Part Descriptors	
1 Outlet	8 Anode
2 Inlet	9 Heating Element*
3 Safety Valve	10 Tank



Downloaded from www.Manualslib.com manuals search engine